

## I PRICE GROUP

### BOND, KEIMO

#### BOND

polyester 100%, weight 250 g/m2 +/-5%, abrasion 100 000 Martindale cycles (EN ISO 12947-2), resistance to pilling 5 (EN ISO 12945-2), light fastness 6 (EN ISO 105-B02), non-flammability certificate (BS EN 1021-1) (BS EN 1021-2), CRIB 5, BS 7176 Medium Hazard, 11M(UNI 9175)



#### KEIMO

surface 100% PU, basic material: 65% polyester, 35% cotton, weight 435 g/m2 +/-5%, abrasion >100 000 Martindale cycles (EN ISO 5470-2 method 1), light fastness >5(EN ISO 105 B 02), resistance to pilling 4-5 (EN ISO 105-X12), non- flammability certificat (BS 5852/DIN EN 1021-1)



## II PRICE GROUP

### FIGHTER, PASTEL, VALENCIA, ERA, ROCCIA, CHARLES, CHARLES STUDIO DESIGN


#### FIGHTER

polyester 100%, weight 365 g/m2, abrasion 130 000 cycles Martindale , resistance to pilling 4-5 (EN ISO 12945-2), light fastness >5 (EN ISO 105-B02), non-flammability certificate (BS EN 1021-1, BS EN 1021-2, BS 5852(part 10.1), Q1 UK, UNI 9175 Class 1 IEMME)



#### PASTEL

polyester 100%- TREVIIRA CS, weight 260g/m2 +/-5%, abrasion 80 000 Martindale cycles, resistance to 5 (EN ISO 12945), light fastness 6 (EN ISO 105-B02), non-flammability certificate (EN 1021-1, EN 1021-2; Crib 5; BS 7176 Medium Hazard; C1, M1, B1, IMO A 652(16), IMO A 471(XII))




#### VALENCIA

surface 100% winyl, basic material - 100% poliester, weight 650g/m2, abrasion 300 000 Martindale cycles (UNE EN 14465:2004), non-flammability certificate (EN 1021-1; EN 1021-2; BS EN 1021-1/2; DIN EN 1021-1/2; IMO A 652(16) 8.2-8.3; FAR 25.853 b(4) APF Part 1(a)(1)(ii)), light fastness > 5 EN ISO 105-B02 antimicrobial protection, antibacterial protection, antimycotic protection, abrasion resistance, resistance to dirt(blood, urine)



#### ERA

Composition: Polyester 100%, Weight: 320g/m2 ±5%, Abrasion Resistance 100 000 Martindale cycles (EN ISO 12947:1998), Fastness to Rubbing 4 (ISO 105-X12:2002), Light Fastness 5 (EN ISO 105-B02:2014), Flammability (BS EN 1021-1 / BS EN 1021-2 / BS7176:2007 Low Hazard)



### ROCCIA

100% polyester-TREVIRA CS weight 250g/m2 +/-5%, abrasion 70 000 Martindale cycles (UNI EN ISO 12947/2), resistance to pilling 5 (EN ISO 12945/2), light fastness 6 (EN ISO 105-B02), fastness to rubbing wet-4 (UNI EN ISO 105-X12) dry-5 (UNI EN ISO 105-X12), non-flammability certificate: EN 1021-1:2006 EN 1021-2:2006 BS 7176:2007 (Medium Hazard); BS 5852:2006 (Crib 5); NFP 92-501-1 (M1), DIN 4102-1 (B1), IMO Res. A 652 (16) Part 8 UNI 9174-UNI 8456 (C1), AM 18(NF D 60013) UNI 9175 Class 1 IM




### CHARLES

Composition: 100% Polyester Weight: 290 g/m2 Roll width: 140cm Abrasion Resistance 90,000 Martindale cycles (BS EN ISO 12947-2:1998) Pilling: 4 (EN ISO 12 945-2) Light Fastness 5 (ISO 105-B02) Fastness to Rubbing Wet: 4-5 (UNI EN ISO 105-X12) Dry: 4-5 (UNI EN ISO 105-X12) Flammability: -DIN EN 1021-1 \*Charles fabric, due to its structure (long hair), can be arranged in a velour way while being used, creating the impression of different shades of upholstery. It is also susceptible to bending while sitting, which is why it should be combed very gently.



### CHARLES STUDIO DESIGN AVAILABLE AT SELECTED DISTRIBUTORS

Composition: 100% Polyester Weight: 290 g/m2 Roll width: 140cm Abrasion Resistance 90,000 Martindale cycles (BS EN ISO 12947-2:1998) Pilling: 4 (EN ISO 12 945-2) Light Fastness 5 (ISO 105-B02) Fastness to Rubbing Wet: 4-5 (UNI EN ISO 105-X12) Dry: 4-5 (UNI EN ISO 105-X12) Flammability: -DIN EN 1021-1 \*Charles fabric, due to its structure (long hair), can be arranged in a velour way while being used, creating the impression of different shades of upholstery. It is also susceptible to bending while sitting, which is why it should be combed very gently. \*Extended delivery time

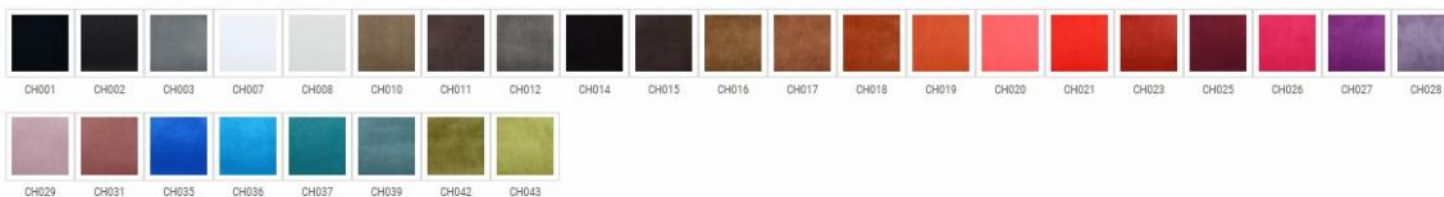


\*Delivery term for orders for Studio Design fabrics is up to 4 weeks.

## III PRICE GROUP

AQUARIUS, BLAZER, SILVERTEX, CRISP, FAME, SYNERGY

### AQUARIUS

wool 100%, weight 370 g/m2 ± 5%, abrasion 60 000 Martindale cycles (BS 5690), resistance to pilling > 4, (BS:EN ISO 12945-2:2000), light fastness 5 (ISO 105 - B02:2013), non-flammability certificate (BS EN 1021-1; BS EN 1021-2; BS7176:2007 Low Hazard) Fabric available until 31.12.2018



### BLAZER

virgin wool 100%, Weight 460g/m2 +/-5%, abrasion resistance 50 000 Martindale cycles, fastness to pilling 4 (BS:EN ISO 12945-2:2000), light fastness 5 (ISO 105-B02:1999); non-flammability certificate: BS EN 1021-1:2006, BS EN 1021-2:2006, BS7176:2007 Low Hazard Fabrics CUZ14, CUZ32, CUZ27 only available till the end of the year



### SILVERTEX

surface-100% Vinyl, basic material - 100% Polyester Hi-Loft2, weight 685g/m2, abrasion 300 000 Martindale cycles (EN ISO 12947:1999 Part 2), light fastness >7, non-flammability certificate (BS EN 1021-1/2, EN 1021/2, EN 71-2, IMO A 652(16)8 2-6.3, FMVSS302)



## CRISP

93% wool, 7% polyamide weight: 328 g/m2 abrasion: 200000 Martindale cycles (EN ISO 12947-2) resistance to pilling 4-5 (EN ISO 12945-2) light fastness 5-7 (EN ISO 105-B02) rubbing fastness 4-5 (EN ISO 105x12 (wet/dry)) non-flammability: EN 1021-1,2; BS 5852 0&1; Calif. Bull.117-E class 1; IMO MS c307(88)Annex 1 part 8; MED certificate IMO



## FAME

95% wool, 5% polyamide weight: 450 g/m2 abrasion: 200 000 Martindale cycles (EN ISO 12947-2) resistance to pilling: 4 (EN ISO 12945-2) light fastness: 5-7 (EN ISO 105-B02) rubbing fastness: 4-5 (EN ISO 105x12 (wet/dry)) non-flammability certificate: EN 1021-1&2; BS 5852:2006 (Crib 5); BS 5852 0&1; UNI 9175 class 1 IM; Calif.Bull.117-E class 1 cleaning: dry cleaning



## SYNERGY

Composition: virgin wool 95%, polyamide 5%; Weight: 400g/m2 ±5% Abrasion Resistance > 100 000 Martindale cycles, Fastness to Rubbing: 4 (ISO 105-X12) Light Fastness: 5 (ISO 105-B02) Flammability: EN 1021-1&2 Cigarette & Match NF D 60-013 UNI 9175 Classe 1 IM BS 7176 Low Hazard




## IV PRICE GROUP

REMIX, LEATHER, REMIX STUDIO DESIGN


### REMIX

Composition: 90% wool, 10% nylon Weight: ok 300 g/m2 Abrasion Resistance: 100 000 Martindale cycles, Pilling: 3-4 (EN ISO 12945-2:2000) Light Fastness: 5-7 (ISO 105-B02:2000) Flammability: EN 1021 - 1/2 BS 5852 Part 1 Onorm B1/Q1 UNI 9175 IMO A.652(16) Crib 5 and B2 Producer: kvadrat Denmark



### LEATHER

size Ca.5m2, thickness >0.8mm-1.1mm, wet rub tests >250 (BS EN ISO 11640: 1998) dry rub tests >500 (EN ISO 11640:1998) flex resistance > 50 000 cycles (BS EN ISO 5402:2002), PCP und CFC used during tanning proces, natural colour variations may occur, non-flammability certificate (UNI EN 1021-1:2006, UNI EN 1021-2:2006)



## REMIX STUDIO DESIGN AVAILABLE AT SELECTED DISTRIBUTORS

Composition: 90% wool, 10% nylon Weight: ok 300 g/m2 Abrasion Resistance: 100 000 Martindale cycles, Pilling: 3-4 (EN ISO 12945-2:2000) Light Fastness: 5-7 (ISO 105-B02:2000) Flammability: EN 1021 - 1/2 BS 5852 Part 1 Onorm B1/Q1 UNI 9175 IMO A.652(16) Cnb 9 and B2 Producer: kvadrat Denmark \*Extended delivery time



\*Delivery term for orders for Studio Design fabrics is up to 4 weeks.

## METAL

METAL

METAL

colors frames



## DECORATIVE STITCH

DECORATIVE STITCH

DECORATIVE STITCH

The decorative stitch is available in the fabrics: Leather, Keimo, Valencia, Silvertex and is dedicated to the collections: CEO, Clubin, Dual, Eleven, In Access, Orte 3DH, Voo Voo.

## V PRICE GROUP - STUDIO DESIGN

STEELCUT TRIO 2 , TURNBERRY , TROON , ACCESSOIRE

### STEELCUT TRIO 2 STUDIO DESIGN

Composition: 90% wool, 10% nylon; Abrasion Resistance 100 000 Martindale cycles; Fastness to Rubbing 3-4 (EN ISO 12945); Light Fastness: 5-7 (ISO 105-B02) Flammability: EN 1021-1/2; BS 5852 part 1; DIN 4102 B2; Önorm B1/Q1; NF D 60 013; UNI 9175 1M; US Cal. Bull. 117, -- 2013; IMO FTP Code 2010: Part 8




### TURNBERRY STUDIO DESIGN

Composition: 100% wool; Weight: 588 g/m2 ± 5%; Abrasion Resistance: 43 000 cycle Martindale; Flammability: BS EN 1021 - 1; CRIB 5



### TROON STUDIO DESIGN

Composition 92% wool, 7% nylon; Weight: 37 g/m2 ± 5%; Abrasion Resistance: 60 000 cycle Martindale; Flammability: BS EN 1021 - 1; CRIB 5



### ACCESSOIRE STUDIO DESIGN

Composition: 85% wool 15% polyamide; Weight: 350 g/m2 +/- 5%; Abrasion Resistance 50 000 Martindale cycles; Fastness to Rubbing: 4 (EN ISO 105-C06); Light Fastness: 5-7 (EN ISO 105-B02); Flammability: BS EN 1021-1 BS EN 1021 - 2

